

Numerical Modelling of Tropical Cyclone Storm Surge

R. J. SOBEY, M.I.E. Aust., B. A. HARPER and G. M. MITCHELL

SUMMARY Details are presented of a general numerical hydrodynamic model for the generation and propagation of tropical cyclone or hurricane storm surge. The model, known as SURGE, solves the two-dimensional depth-integrated form of the Long Wave Equations using an explicit finite difference procedure, with tropical cyclone surface wind and pressure forcing estimated from an adaption of available models based on U.S. hurricanes. Variations in tropical cyclone parameters as well as the physical characteristics of a coastal location such as bathymetry and details of capes, bays, reefs and islands are accommodated by the model. The accuracy and stability of the numerical solution have been confirmed by a comprehensive wave deformation analysis including quasi-non-linear effects and the open boundary problem has been overcome by the use of a Bathystrophic Storm Tide approximation to boundary water levels. A detailed sensitivity analysis has identified the principal surge generating parameters and the model has been checked against an historical tropical cyclone storm surge. SURGE has been used extensively in the northern Australian region and examples are presented.

1 INTRODUCTION

The tropical cyclone or hurricane storm surge is a meteorologically forced long wave motion resulting in a sustained superelevation of the sea surface, at least for a few hours, above that produced by the normal periodic astronomical tide. It is the result of the combined action on the underlying water body of the extreme atmospheric pressure gradients and wind shear stresses generated by a mature tropical cyclone. The region of surge intensification can extend over a substantial length of coastline (of order 200 km) and the development and impact of the surge wave at a particular site is sensitive to a number of meteorological and topographical factors. Briefly these are the intensity and scale of the tropical cyclone, the speed and track of the storm, the underwater and overbank terrain, offshore reefs and islands, local coastal features (bays, headlands, estuaries) and the astronomical tide. Historically, storm tides have resulted in considerable damage to exposed coastlines, the flooding of low lying land and loss of life. A potentially critical situation arises when the total sustained water level (surge + tide) exceeds the highest astronomical tide (HAT) level.

In response to the need for reliable storm surge estimates in northern Australia for the design of coastal structures and for the protection of coastal communities, a numerical hydrodynamic model was developed within the Department of Civil and Systems Engineering at James Cook University. The model, known as SURGE, is a general numerical hydrodynamic model for the generation and propagation of tropical cyclone storm surge and can be applied to most coastal regions (11). It includes the effects of undersea bathymetry, offshore islands, reefs and other coastal features, as well as the flooding of low lying land. Tropical cyclone size, intensity and track can be varied continuously throughout a simulation to produce water flow patterns, contours of water level,

(Paper C1344 submitted to The Institution of Engineers, Australia on 16 June 1981).

coastal surge profiles at any time and water level and flow velocity time histories anywhere within the model area. SURGE is a comprehensive software system and is fully documented in the form of a user's guide (4). Particular attention has been given to the quite considerable problems of input data format and especially output data selection and presentation.

While numerical modelling of long wave propagation is not new, there are a number of unique aspects of the storm surge problem. In particular, the complex character and geophysical extent of the meteorological forcing, the specification of suitable open boundary conditions and the satisfactory resolution of the storm structure in discretised form all require special attention (11).

2 MATHEMATICAL FORMULATION

The response of a homogeneous sea to the meteorological forcing of a tropical cyclone is described by the full Navier-Stokes Equations for a homogeneous, incompressible fluid. Direct numerical solutions of these equations are as yet not feasible and a three-dimensional solution would only appear necessary where fluid density difference and/or the vertical flow structure may be important. An adequate description of long wave propagation (astronomical tides and storm surge) can be had from a two-dimensional vertically integrated form of the Reynolds Equations - the Long Wave Equations (16). These equations represent the conservation of mass and the conservation of momentum in horizontal directions x and y and time t :

$$\frac{\partial \eta}{\partial t} + \frac{\partial U}{\partial x} + \frac{\partial V}{\partial y} = 0 \quad (1)$$

$$\begin{aligned} \frac{\partial U}{\partial t} + \frac{\partial}{\partial x} \left(\frac{U^2}{\eta-d} \right) + \frac{\partial}{\partial y} \left(\frac{UV}{\eta-d} \right) - fV \\ = -g(\eta-d) \frac{\partial \eta}{\partial x} - \left(\frac{\eta-d}{\rho_w} \right) \frac{\partial p_s}{\partial x} + \frac{1}{\rho_w} (\tau_{sx} - \tau_{bx}) \end{aligned} \quad (2)$$

$$\begin{aligned} \frac{\partial V}{\partial t} + \frac{\partial}{\partial x} \left(\frac{UV}{\eta-d} \right) + \frac{\partial}{\partial y} \left(\frac{V^2}{\eta-d} \right) + fU \\ = -g(\eta-d) \frac{\partial \eta}{\partial y} - \left(\frac{\eta-d}{\rho_w} \right) \frac{\partial p_s}{\partial y} + \frac{1}{\rho_w} (\tau_{sy} - \tau_{by}) \end{aligned} \quad (3)$$

The x-y datum plane is located at the mean water level with the z axis directed vertically upwards. The water surface elevation with respect to datum is $\eta(x,y,t)$, the sea bed is $d(x,y)$ with respect to datum, U and V are depth-integrated flows per unit width, f is the Coriolis parameter and ρ_w is the mass density of sea water. The forcing influence of the tropical cyclone is represented through the surface wind shear stress vector $\tau_s(x,y,t)$, resolved into components τ_{sx} and τ_{sy} , and the x and y gradients of the M.S.L. atmospheric pressure $p(x,y,t)$. The effect of bottom stress is represented through the seabed shear stress vector $\tau_b(x,y,t)$, resolved into components τ_{bx} and τ_{by} such that, for example, in blue water regions:


$$\tau_{bx} = \frac{\lambda}{8} \rho_w \frac{|Q|U}{(\eta-d)^2} \tag{4}$$

where $Q = (U^2+V^2)^{1/2}$ is the total flow per unit width and λ is the Darcy-Weisbach friction factor, assumed depth-dependent according to the Colebrook-White formula for a hydraulically rough boundary layer. Modified values of λ are adopted near reefs and for overbank flooding, the details being presented below.

At this stage the equations are sometimes linearised, neglecting the (normally small) convective accelerations. In SURGE all terms have been retained as they present no particular numerical


TABLE I
SURGE COMPUTATIONAL MOLECULES AND FINITE DIFFERENCE EQUATIONS

Mass Conservation Equation -

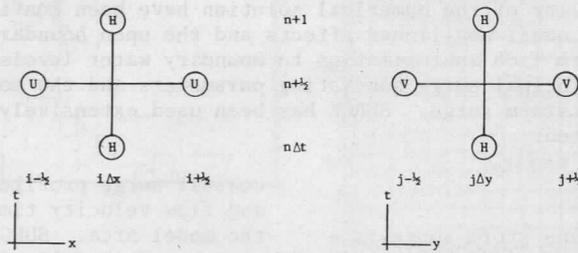

$$H_{i,j}^{n+1} = H_{i,j}^n - \left[\frac{U_{i+1/2,j}^{n+1/2} - U_{i-1/2,j}^{n+1/2}}{\Delta x} + \frac{V_{i,j+1/2}^{n+1/2} - V_{i,j-1/2}^{n+1/2}}{\Delta y} \right] \Delta t \tag{a}$$

X Momentum Equation -

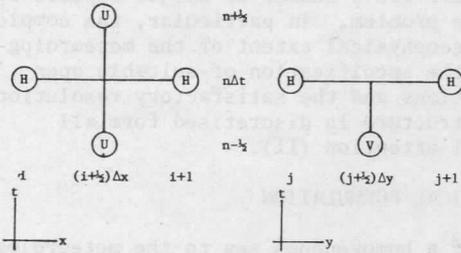


$$\begin{aligned} U_{i+1/2,j}^{n+1/2} = & \left[U_{i+1/2,j}^{n-1/2} \right. \\ & - \left(\frac{U_{i+1/2,j}^{n-1/2} - U_{i+3/2,j}^{n-1/2}}{2\Delta x} \frac{H_{i+1,j}^n - H_{i,j}^n}{\Delta x} - \frac{U_{i+1/2,j}^{n-1/2} - U_{i-1/2,j}^{n-1/2}}{2\Delta x} \frac{H_{i,j+1}^n - H_{i,j}^n}{\Delta y} \right. \\ & + \left. \frac{U_{i+1/2,j+1}^{n-1/2} - U_{i+1/2,j-1}^{n-1/2}}{2\Delta y} \frac{H_{i+1,j}^n - H_{i,j}^n}{\Delta x} - \frac{U_{i+1/2,j+1}^{n-1/2} - U_{i-1/2,j+1}^{n-1/2}}{2\Delta y} \frac{H_{i,j+1}^n - H_{i,j}^n}{\Delta y} \right. \\ & - f \bar{V}_{i+1/2,j}^{n-1/2} \\ & + g \frac{\bar{D}X_{i+1/2,j}^n}{\Delta x} \frac{H_{i+1,j}^n - H_{i,j}^n}{\Delta x} \\ & + g \frac{\bar{D}X_{i+1/2,j}^n}{\Delta x} \frac{H_{i+1,j+1}^n - H_{i,j+1}^n}{\Delta y} \\ & \left. - W_{i+1/2,j}^n \right] \Delta t \Bigg/ \left[1 + \Delta t \frac{\lambda}{8} \sqrt{\frac{(U_{i+1/2,j}^{n-1/2})^2 + (V_{i+1/2,j}^{n-1/2})^2}{(\bar{D}X_{i+1/2,j}^n)^2}} \right] \tag{b} \end{aligned}$$

where $\bar{D}X_{i+1/2,j}^n = \frac{1}{2}(D_{i,j} + H_{i,j}^n + D_{i+1,j} + H_{i+1,j}^n)$

$$\bar{V}_{i+1/2,j}^{n-1/2} = \frac{1}{2}(V_{i+1,j+1/2}^{n-1/2} + V_{i+1,j-1/2}^{n-1/2} + V_{i-1,j+1/2}^{n-1/2} + V_{i-1,j-1/2}^{n-1/2})$$

Y Momentum Equation -

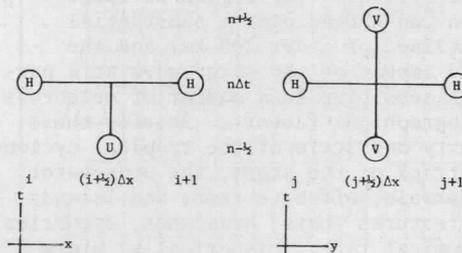

$$\begin{aligned} V_{i,j+1/2}^{n+1/2} = & \left[V_{i,j+1/2}^{n-1/2} \right. \\ & - \left(\frac{V_{i+1,j+1/2}^{n-1/2} - V_{i-1,j+1/2}^{n-1/2}}{2\Delta x} \frac{H_{i+1,j+1}^n - H_{i,j+1}^n}{\Delta x} - \frac{V_{i+1,j+1/2}^{n-1/2} - V_{i+1,j-1/2}^{n-1/2}}{2\Delta x} \frac{H_{i+1,j+1}^n - H_{i,j+1}^n}{\Delta y} \right. \\ & + \left. \frac{V_{i,j+1/2+1}^{n-1/2} - V_{i,j+1/2-1}^{n-1/2}}{2\Delta y} \frac{H_{i+1,j+1}^n - H_{i,j+1}^n}{\Delta x} - \frac{V_{i,j+1/2+1}^{n-1/2} - V_{i,j-1/2+1}^{n-1/2}}{2\Delta y} \frac{H_{i,j+1}^n - H_{i,j}^n}{\Delta y} \right. \\ & + f \bar{U}_{i,j+1/2}^{n-1/2} \\ & + g \frac{\bar{D}Y_{i,j+1/2}^n}{\Delta y} \frac{H_{i,j+1}^n - H_{i,j}^n}{\Delta x} \\ & + g \frac{\bar{D}Y_{i,j+1/2}^n}{\Delta y} \frac{H_{i,j+1+1}^n - H_{i,j+1}^n}{\Delta y} \\ & \left. - W_{i,j+1/2}^n \right] \Delta t \Bigg/ \left[1 + \Delta t \frac{\lambda}{8} \sqrt{\frac{(U_{i,j+1/2}^{n-1/2})^2 + (V_{i,j+1/2}^{n-1/2})^2}{(\bar{D}Y_{i,j+1/2}^n)^2}} \right] \tag{c} \end{aligned}$$

where $\bar{D}Y_{i,j+1/2}^n = \frac{1}{2}(D_{i,j} + H_{i,j}^n + D_{i,j+1} + H_{i,j+1}^n)$

$$\bar{U}_{i,j+1/2}^{n-1/2} = \frac{1}{2}(U_{i+1/2,j+1}^{n-1/2} + U_{i+1/2,j}^{n-1/2} + U_{i-1/2,j+1}^{n-1/2} + U_{i-1/2,j}^{n-1/2})$$

problems and in some cases the commonly neglected terms (such as Coriolis and convective accelerations) can even be relatively important (6,11). A SURGE input option however does allow the convective terms to be omitted (4).

3 NUMERICAL SOLUTION

The flow field, coastal details, offshore and over-bank bathymetry and coral reefs are represented on a square grid of unit dimension Δs and discrete values of the variables are specified on a space (x,y) and time (t) staggered computational grid, whose node points are defined as $(i\Delta x, j\Delta y, n\Delta t)$. Water surface elevation H (or η), bed elevation D (or d) with respect to M.S.L. and barometric head $B = p_s/\rho_w g$ are located at points (i,j,n) , depth-integrated flow U and the surface wind shear stress term $WX = \tau_{sx}/\rho_w$ at $(i+\frac{1}{2}, j, n+\frac{1}{2})$ and the depth-integrated flow V and the surface wind shear stress term $WY = \tau_{sy}/\rho_w$ at $(i, j+\frac{1}{2}, n+\frac{1}{2})$ points.

Numerical integration of the partial differential Equations 1,2 and 3 is accomplished by an explicit "leapfrog" procedure similar to that used in the numerical simulation of storm tides in Galveston Bay, Texas, by Reid and Bodine (8). The computational molecules and explicit finite difference equations are listed in Table 1, the continuity equation being centred at $(i,j,n+\frac{1}{2})$, the x momentum equation at $(i+\frac{1}{2}, j, n)$ and the y momentum equation at $(i, j+\frac{1}{2}, n)$. In a number of special cases associated with boundary or internal (reef, weir, island) constraints, the complete finite difference Equations b and c of Table 1 cannot be implemented and suitably reduced forms (11) are adopted in such circumstances. Successive application of the x and y momentum equations and the continuity equation, together with appropriate boundary conditions advance the solution by one simulation time step Δt .

4 STABILITY AND WAVE DEFORMATION

As SURGE is based on explicit finite difference equations, numerical stability for all wave numbers is ensured only when the Courant number $Cr = [g(\eta-d)]^{1/2} \Delta t / \Delta s$ does not exceed unity. Compliance with this equation, however, does not necessarily guarantee the accuracy of the solution and a broader analysis of the model behaviour is necessary to fully examine the numerical distortion of the physical surge wave. Some measure of this distortion can be had from a comparison of the numerical and analytical solutions of the equations in the time domain using the complex propagation factor of Leendertse (7). This method allows evaluation of the wave-number-dependent amplitude and phase distortions introduced by the numerical solution.

Assuming the non-linear interactions to be weak, as is generally the case for the Long Wave Equations, an evaluation of the wave deformation characteristics of the solution can be obtained from a quasi-linear approximation to the finite difference equations (11). The results show that the finite difference equations are appropriate discrete approximations to the partial differential equations across the complete wave number spectrum. For typical applications with $Cr=1.0$ and $L/\Delta s$ of order 25, negligible phase and amplitude distortion can be expected.

5 BOUNDARY CONDITIONS

The mathematical description of the computational field is completed by the specification of suitable boundary conditions, which for SURGE can be divided

into a number of broad categories. Consistent with the staggered finite difference representation of the flow field, boundary conditions for either U or V (i.e. flow) situations take effect at spatial locations midway between nodes. For H (i.e. water level) situations the conditions require some interpretation in terms of the general finite difference equations; two or more conditions could apply at the one location and in many cases the spatial coverage of the general schemes needs to be restricted in the vicinity of a constraint. All this information is supplied to the model by the systematic specification of over fifty different flag conditions (4).

(a) *Coastal Boundaries.* These represent the simplest boundary conditions, stipulating vanishing normal transport across the coast at sea nodes adjacent to land nodes

$$\text{i.e. } U_{i+\frac{1}{2},j}^{n+\frac{1}{2}} = 0 \text{ or } V_{i,j+\frac{1}{2}}^{n+\frac{1}{2}} = 0 \quad (5)$$

Various combinations of these component conditions, together with the normal case of uninterrupted flow, allow the representation of any area of coastline.

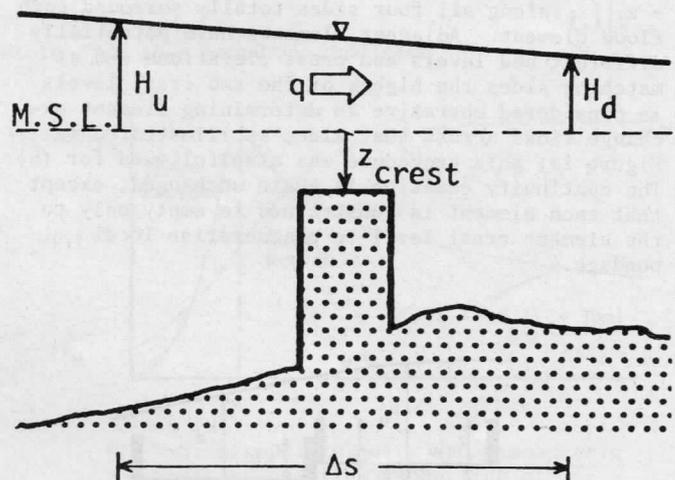


Figure 1 Schematic representation of reef boundary condition

(b) *Reefs and Low Barriers.* In terms of long wave propagation it is appropriate to represent the presence of reefs or sand banks within the flow field as a submerged broad-crested weir, an overflow broad-crested weir, or a total flow barrier. The exact representation depends upon the crest elevation of the reef z_{crest} with respect to the instantaneous water levels, H_u on the upstream side and H_d on the downstream side of the reef. This is shown schematically in Figure 1 where q is the resulting water discharge (i.e. U or V , depending on reef orientation) across the reef. In the vicinity of reefs it is convenient to omit the smaller convective and Coriolis acceleration terms from the momentum equations. The influence of the reef is then represented by an effective Darcy-Weisbach friction factor (12) based on the normal submerged and overflow broad-crested weir equations through an assumption of locally uniform flow:

$$\tau_{bx} = \frac{\lambda}{8} \rho_w \frac{|U|U}{(\eta-d)^2} \quad (6)$$

$$\lambda = \begin{cases} \frac{8(\eta-d)^3}{(C_1 \Delta W_1)^2 \Delta s} & \text{for submerged weir} \\ \frac{16(\eta-d)^3}{(C_2 \Delta W_2)^2 \Delta s} & \text{for overflow weir} \end{cases}$$

C_1 = submerged weir discharge coefficient ($\sqrt{2}$)
 ΔW_1 = submerged weir head = $\frac{1}{2}(H_u + H_d) - z_{crest}$
 C_2 = overflow weir discharge coefficient (0.5)
 and ΔW_2 = overflow weir head = $H_u - z_{crest}$

For the case of $z_{crest} > H_u$ or H_d (total flow barrier), the conventional coastal boundary (a) applies. The continuity equation remains unchanged for all cases. Offshore reefs are mostly subgrid effects as their spatial scale is small compared with Δs . In such cases the seabed levels ($D_{i,j}$) should be selected as if the reefs did not exist. Such reef conditions have been used extensively for computations in the vicinity of the Great Barrier Reef.

(c) *Coastal Flooding.* The coastal flooding algorithm in SURGE represents the wetting and drying of low lying land through a two-dimensional cascading of broad-crested weirs and local storages (12). It is consistent in spirit with the representation of offshore reefs in (b). Each flood element is considered centred on a grid or H point and has horizontal dimensions Δs by Δs , with sides passing through the U and V locations at half-grid points. Bed elevation $D_{i,j}$ is as usual specified at the H point while broad-crested weirs with elevation $D_{i,j} + z_{c|i,j}$ along all four sides totally surround each flood element. Adjacent elements have potentially different bed levels and crest elevations and at matching sides the higher of the two crest levels is considered operative in determining element exchange flows across that side, as illustrated in Figure 2a; this procedure was also followed for (b). The continuity equation is again unchanged, except that each element is constrained to empty only to the element crest level to characterise local pondage.

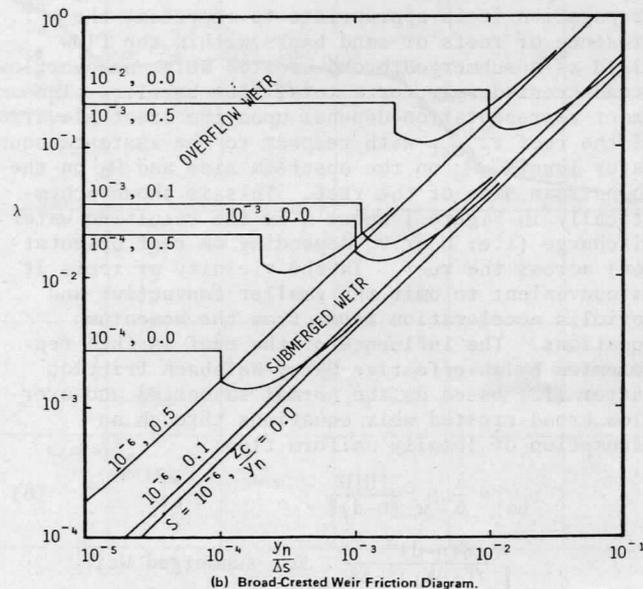
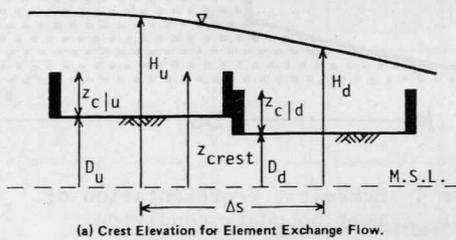


Figure 2 Coastal flooding boundary condition

Frictional resistance to overbank flow is represented through the weir height z_c relative to local bed level and through the spacing of these weirs Δs . Given a grid scale, the choice of appropriate z_c , in the absence of calibration data, can reasonably be based on an engineering estimate of the equivalent weir behaviour of say urban housing or mangrove swamps. A non-dimensional weir friction diagram, Figure 2b, has been prepared to assist in the estimation and evaluation of overbank resistance. It is based on the λ estimates of Equation 6 and shows the dependence of the friction factor on the dimensionless relative weir height z_c/y_n , the dimensionless normal depth $y_n/\Delta s$ and the slope of the uniform flow energy grade line S , y_n being the normal depth.

(d) *Open Sea Boundaries.* While open boundary conditions for astronomical tide propagation are quite straightforward and require only the specification of water surface histories at these locations for satisfactory representation, meteorological tides are generated by local surface forces. For a tropical cyclone the spatial extent of the forcing approaches 1000 km, although the region of peak positive and negative surges has a spatial scale of the order of the radius of maximum winds (typically 30 km). In such a case meteorological forcing outside the computational field can only be represented by the open boundary condition. Ideally the open boundaries would be insignificant. However, the storage and speed limitations of present time-shared computer systems preclude the adoption of a computational field that has linear dimensions of the order of 1000 km and simultaneously reproduces details on the scale of the radius of maximum winds. A practical compromise to this conflict of scales has been incorporated in SURGE by effectively including the forcing influence outside the computational field in the open boundary conditions.

Three separate forms of open boundary conditions are available in SURGE (3,11):

(i) Pressure Surge Condition ($H = \Delta B$), where open boundary water levels are set equal to the pressure surge, the head of water equivalent to the local atmospheric pressure deficit, i.e.

$$H_{i,j}^n = (p_\infty - p_s |_{i,j}^n) / \rho_w g \quad (7)$$

This condition is regarded as only a first approximation to the actual water levels along an open boundary as it does not include the effects of the wind tide. The pressure surge condition is the default condition and is used as an initial value in condition (ii) below.

(ii) Bathystrophic Storm Tide (B.S.T.) Approximation, where open boundary water levels are set equal to the local bathystrophic storm tide, i.e. the quasi-steady profile described, for example by

$$0 = -g(\eta-d) \frac{\partial \eta}{\partial x} - \frac{(\eta-d)}{\rho_w} \frac{\partial p_s}{\partial x} + \frac{\tau_{sx}}{\rho_w} \quad (8)$$

when the open boundary is in the x direction and intersects the coastline.

From a physical viewpoint the bathystrophic tide condition provides a reasonably realistic boundary condition. It involves a lowest order momentum balance along the open boundary to include the forcing influence of the tropical cyclone outside the boundary. Water levels along the open boundary can rise and fall in response to the intensity and position of the tropical cyclone as shown in Figure 3. Such a boundary condition enables optimal use of the grid coverage, realistic water levels and

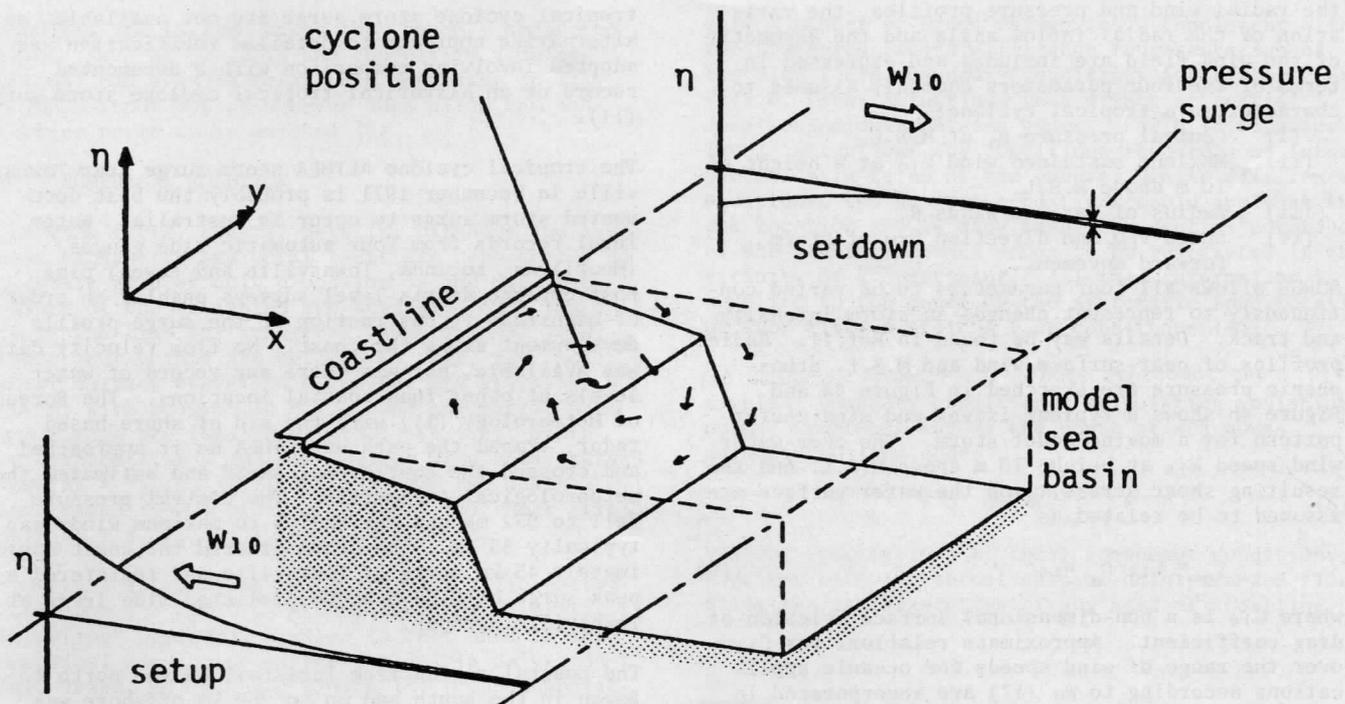


Figure 3 Concept of Bathystrophic Storm Tide open boundary condition

flow patterns being obtained in close proximity to the boundaries. Detailed discussions are given elsewhere (3,11).

(iii) Time Dependent Water Level Inputs, where open boundary water levels are set equal to supplied water levels (e.g. tidal input, hydrographs),


$$H_{i,j}^n = h(t) \tag{9}$$

This form of open boundary condition can also be used in conjunction with (i) and (ii) above, although no interaction between the two inputs (viz. meteorological and astronomical) is assumed. The appropriate meteorological forcing, pressure surge or B.S.T., is first applied with water levels at M.S.L., and the time dependent water levels are then added. Additionally this condition allows a "dual model" approach, in which water levels derived from a large scale model are used later as open boundary inputs to a smaller scale, detailed model of a particular section of coast.


6 TROPICAL CYCLONE FORCING

The aerodynamics of the tropical cyclone and the hydrodynamics of the underlying water body are coupled by the atmospheric pressure p_s and wind shear stress τ_s at the air-sea interface. Their estimation throughout the flow field during the passage of a tropical cyclone follows from the adoption of a suitable model of the near-surface meteorological structure of the storm. The model developed initially by Graham and Nunn (2,15) under the National Hurricane Research Project (NHRP) of the former U.S. Weather Bureau forms the basis of the tropical cyclone sub-model in SURGE. No claim is made that this model is entirely satisfactory; in fact our knowledge of tropical cyclone wind fields is far from complete, especially in Australia. It has been adopted in the absence of a more suitable alternative.

Many of the highly empirical aspects of the original NHRP model, such as rate of filling over land and the reduction of over-land wind speeds, have been omitted in favour of representing the major features of the tropical cyclone. In particular

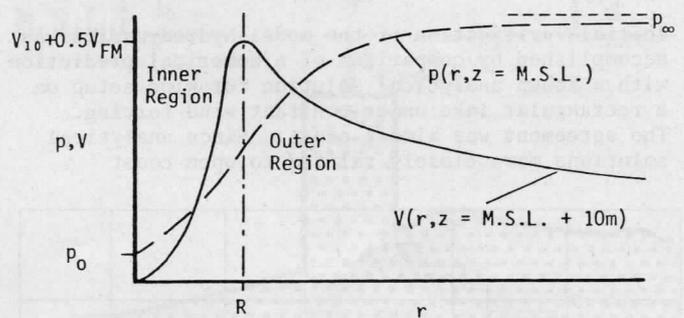

(a) Typical wind velocity and atmospheric pressure profiles along line of maximum winds

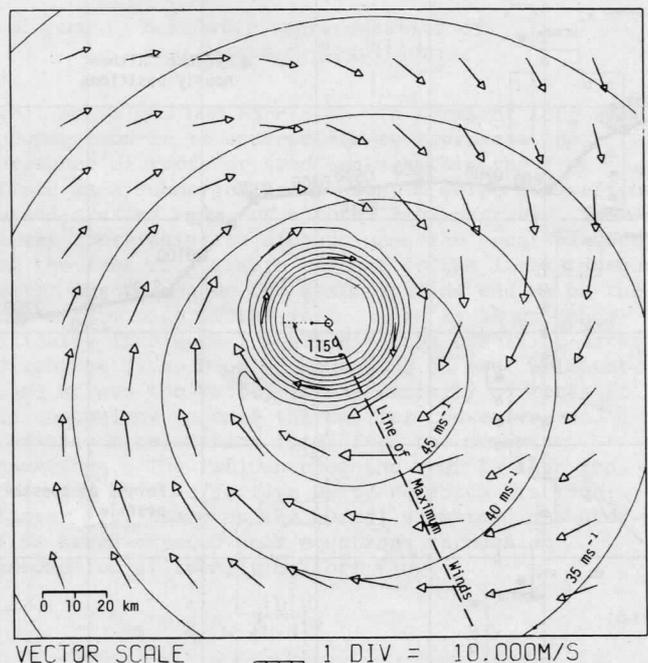

(b) Typical isovel and wind vector pattern for a moving model storm

Figure 4 Structure of tropical cyclone forcing

the radial wind and pressure profiles, the variation of the radial inflow angle and the asymmetry of the wind field are included and expressed in terms of the four parameters commonly assumed to characterise a tropical cyclone:

- (i) Central pressure p_0 at M.S.L.
- (ii) Maximum sustained wind V_{10} at a height of 10 m above M.S.L.
- (iii) Radius of maximum winds R .
- (iv) Speed V_{FM} and direction θ_{FM} of storm forward movement.

SURGE allows all four parameters to be varied continuously to represent changes in storm intensity and track. Details may be found in Ref.11. Radial profiles of near-surface wind and M.S.L. atmospheric pressure are sketched in Figure 4a and Figure 4b shows a typical isovel and wind vector pattern for a moving model storm. The over-water wind speed W_{10} at height 10 m above M.S.L. and the resulting shear stress τ_s on the water surface are assumed to be related as

$$\tau_s = C_{10} \rho_a W_{10}^2 \quad (10)$$

where C_{10} is a non-dimensional surface friction or drag coefficient. Approximate relations for C_{10} over the range of wind speeds for oceanic applications according to Wu (17) are incorporated in SURGE.

7 MODEL VERIFICATION AND SENSITIVITY TESTING

Initial verification of the model hydrodynamics was accomplished by comparison of a numerical prediction with a known analytical solution for wind setup on a rectangular lake under constant wind forcing. The agreement was almost exact. Since analytical solutions more closely related to open coast

tropical cyclone storm surge are not available, an alternative approach to detailed verification was adopted involving comparison with a documented record of an historical tropical cyclone storm surge (11).

The tropical cyclone ALTHEA storm surge near Townsville in December 1971 is probably the best documented storm surge to occur in Australia. Water level records from four automatic tide gauges (Mourilyan, Lucinda, Townsville and Bowen) plus post-cyclone debris level surveys enabled an order-of-magnitude reconstruction of the surge profile development along the coast. No flow velocity data was available, nor was there any record of water levels at other than coastal locations. The Bureau of Meteorology (1), with the aid of shore-based radar, traced the path of ALTHEA as it approached and crossed the continental shelf and estimated the meteorological parameters. The central pressure fell to 952 mb and the radius to maximum winds was typically 35 km. The storm crossed the coast approximately 45 km north of Townsville and registered a peak surge of 2.78 m above predicted tide level at Townsville Harbour.

The coastal region from Innisfail in the north to Bowen in the south and up to 260 km offshore was represented on a 5 n mile grid system of 30 by 40 points as shown in Figure 5 which includes a reconstructed path of ALTHEA. The coastline is shown as a series of straightline barriers while the Great Barrier Reef is indicated by a series of broken line barriers that maintain the recognised

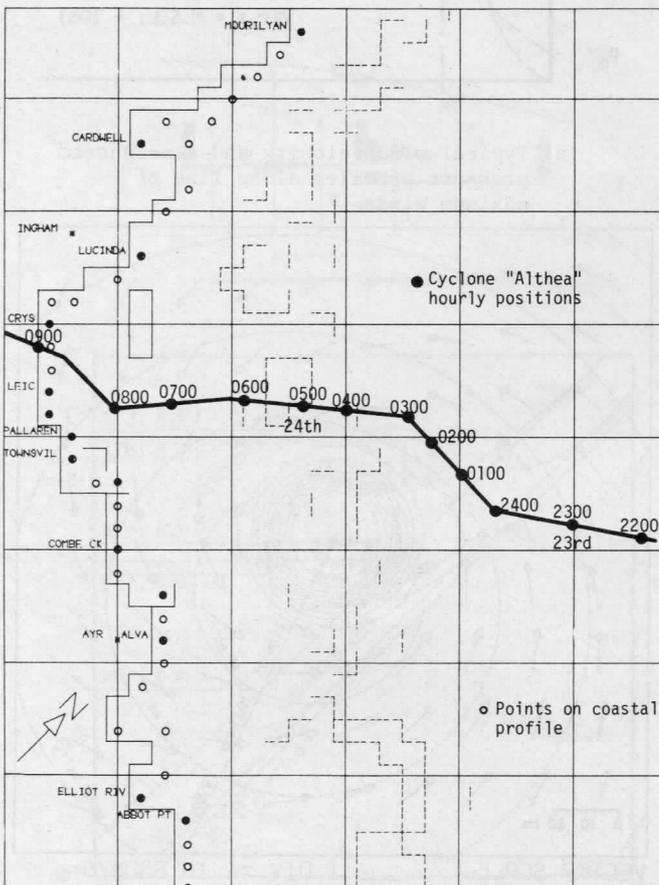


Figure 5 Model representation of Townsville region and track during Tropical Cyclone ALTHEA

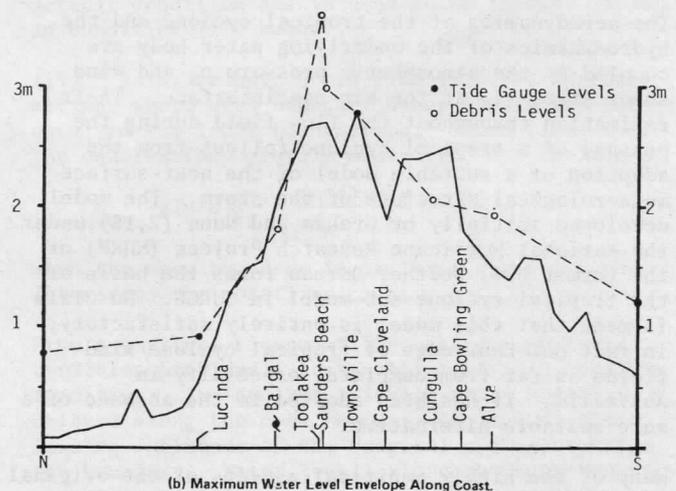
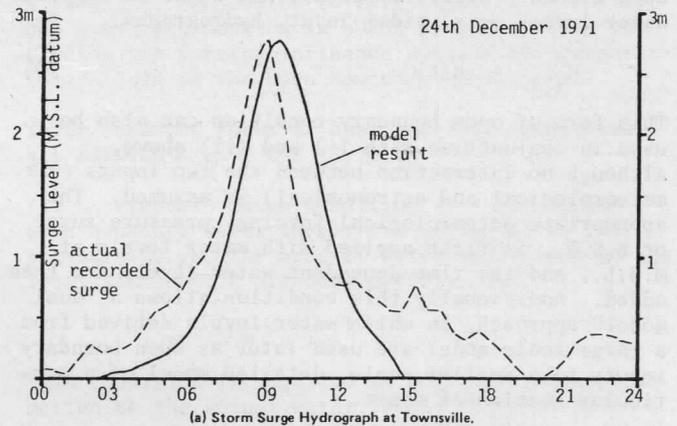



Figure 6 SURGE hindcast of Tropical Cyclone ALTHEA

shipping passages. Due to an almost complete lack of information on the offshore astronomical tide, the simultaneous propagation of tide and surge could not be considered and the hindcast is compared to the deviation of water levels away from predicted astronomical tide (and ignoring nonlinear interactions). Figures 6a and b show the results of SURGE simulation compared with the storm surge hydrograph recorded at Townsville Harbour and also with less reliable data available on maximum coastal water levels. The results show good agreement with this limited historical record, even at this coarse 5 n mile resolution level. A more thorough evaluation will only be possible when spatially comprehensive time histories of sea surface development of the type promised by the SEASAT satellite programme become available. Figure 7a shows part of the model flow field shortly after the storm has crossed the line of barrier reefs and the strong currents generated along the coastline and through the numerous reef passages. Figure 7b shows contours of water level above M.S.L. at the time of storm landfall.


In addition to the comparison with an historical record, a comprehensive sensitivity analysis was undertaken to evaluate the model performance under various conditions (6,11) and to define the likely envelope of response. In particular, testing of various dynamic open boundary situations was undertaken together with consideration of bed friction specifications, bathymetry effects, coastal forms and initialization. A broad range of tropical cyclone parameters, including track, was also examined and highlighted the need for adequate resolution of the storm wind and pressure structure. An $R/\Delta s$ ratio of at least 4 was shown to be necessary for an accurate representation of the structure of the storm forcing.

8 MODEL APPLICATIONS

SURGE has been used extensively for the study of tropical cyclone storm surge hazard in northern Australia. In particular a comprehensive analysis was undertaken for the Beach Protection Authority, Brisbane, at ten separate sites along the Queensland coast and covering over 2000 km of coastline (5,11). At each of the sites three tropical cyclones at each of three approach directions were modelled, based on a statistical analysis of historical tropical cyclone records, and their effect on coastal locations was examined in detail. This extensive study required the modelling of a wide range of coastal features from the shallow waters of the Gulf of Carpentaria, through the Great Barrier Reef dominated Coral Sea coast to the comparatively narrow and plunging continental shelf along Queensland's Gold Coast region. Other study areas in northern Australia include Mermaid Sound in Western Australia (13), an area subject to the most severe tropical cyclones in Australia, and even more detailed investigations of estuarine storm surge penetration at Weipa on Cape York Peninsula (14) and Trinity Inlet at Cairns (12). The latter two studies included the use of a one-dimensional hydrodynamic model ESTFLO (9) which was interfaced with SURGE. Figure 8 shows the Trinity Inlet model structure where a three-pass procedure was adopted, involving two successive grid scale reductions by factors of six and appropriate truncation of the computational field at each pass. This structure was necessary to include the area of significant meteorological forcing and still reproduce overbank flooding within Trinity Inlet and in a loop around Admiralty Island. This formulation was necessary to achieve a realistic representation of the flow pattern between the deeper channels which are the

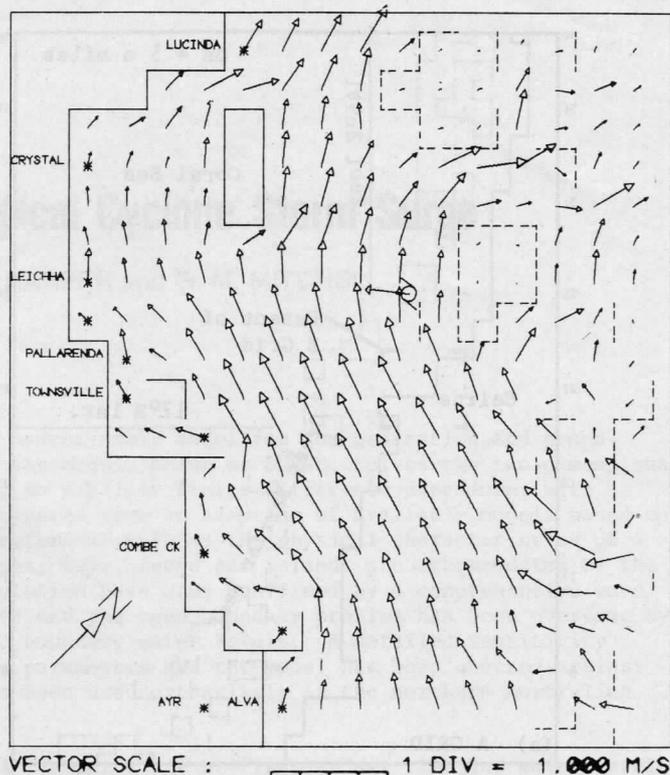

(a) Flow velocity pattern three hours before storm landfall

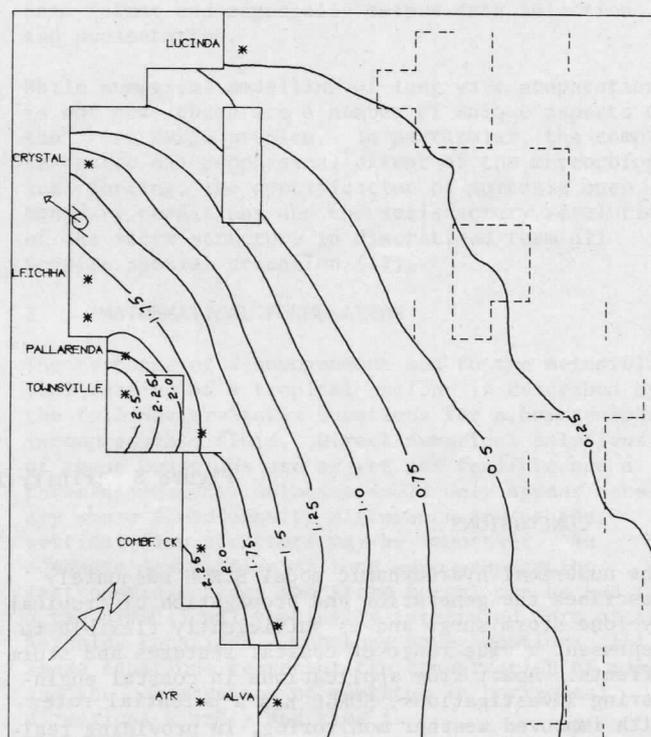

(b) Water surface contour pattern at time of storm landfall

Figure 7 Typical SURGE output for ALTHEA hindcast

major vehicle for surge penetration, and the extensive mangrove areas. Figure 9 shows a typical time sequence of surge penetration and overbank flooding within the C grid region. Heights are in cm above M.S.L. datum.

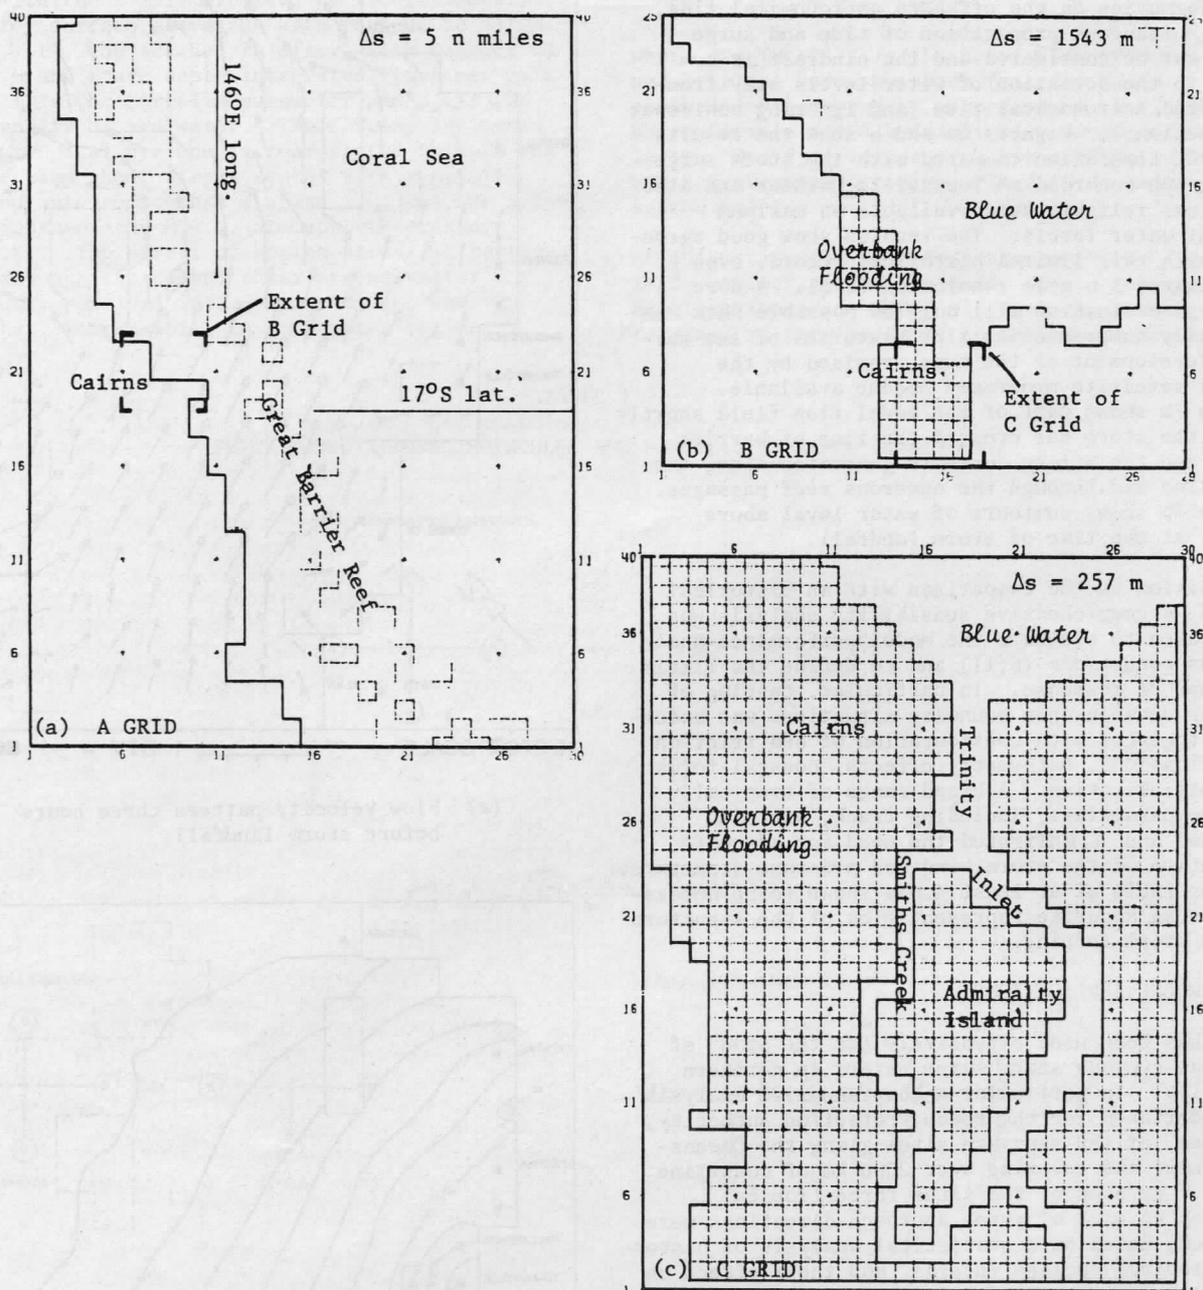


Figure 8 Trinity Inlet model structure

9 CONCLUSIONS

The numerical hydrodynamic model SURGE adequately describes the generation and propagation of tropical cyclone storm surge and is sufficiently flexible to represent a wide range of coastal features and storm effects. Apart from applications in coastal engineering investigations, SURGE has a potential role, with improved weather monitoring, in providing real-time forecasting advice to aid in counter-disaster planning.

10 ACKNOWLEDGEMENTS

The authors wish to thank Professor K.P. Stark for his initiation and continued support of this programme of research. We also acknowledge contributions by colleagues T.S. Adil and A.B. Mills in overall model development and the kind permission of the Department of Housing and Construction, Canberra, for the use of some illustrations.

11 REFERENCES

1. Bureau of Meteorology, "Report by Director of Meteorology on Cyclone 'Althea'", July 1972.
2. Graham, H.E. and Nunn, D.E., "Meteorological Considerations Pertinent to Standard Project Hurricane, Atlantic and Gulf Coasts of the United States", U.S. Weather Bureau, National Hurricane Research Project, Report No.33, 1959.
3. Harper, B.A. and Sobey, R.J., "Open Boundary Conditions for Open Coast Hurricane Storm Surge", submitted for publication, 1981.
4. Harper, B.A., Sobey, R.J. and Stark, K.P., "User's Guide to SURGE", Department of Civil and Systems Engineering, James Cook University, November 1977, unpublished.

Surge Heights H (cm) above M.S.L. for J= 40 to 1 and I= 1 to 30

40	9999	123	122	121	120	119	118	117	116	115	114	113	112	111	110	109	109	108	107	107											
39	9999	139	128	129	126	123	121	118	117	116	114	113	112	110	106	103	101	100	99	100	102	107									
38	9999	130	127	124	122	119	116	115	114	113	111	108	104	100	98	96	94	91	100	107											
37	9999	129	126	123	120	117	114	113	112	110	107	103	99	96	93	89	85	81	88	81	88	81									
36	9999	128	124	120	117	114	113	112	110	107	103	98	95	91	88	81	88	81	88	81	88	81									
35	9999	125	121	117	114	112	111	110	107	102	97	94	89	81	88	81	88	81	88	81	88	81									
34	9999	122	117	114	112	111	109	105	101	96	91	86	81	88	81	88	81	88	81	88	81	88									
33	9999	114	113	111	108	104	100	96	91	86	81	88	81	88	81	88	81	88	81	88	81	88									
32	9999	109	110	101	100	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
31	9999	107	108	100	100	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
30	9999	106	106	100	100	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
29	9999	105	105	100	100	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
28	9999	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103									
27	9999	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103									
26	9999	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102									
25	9999	102	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101									
24	9999	100	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101									
23	9999	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100									
22	9999	100	90	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
21	9999	162	149	137	126	117	106	100	95	94	92	99	98	100	99	99	99	98	82	61	99	99									
20	9999	157	148	138	126	117	104	99	95	94	92	99	96	101	99	99	98	83	52	99	99	99									
19	9999	147	139	126	114	102	98	94	94	92	99	97	71	75	101	106	87	99	98	95	72	41									
18	9999	146	136	123	112	103	97	93	95	93	99	97	80	110	110	101	98	102	92	98	98	96									
17	9999	154	139	135	119	112	102	96	90	98	99	99	98	70	98	98	81	96	98	98	95	77									
16	9999	131	119	109	99	94	88	98	97	97	97	97	97	97	97	97	97	97	97	97	97	97									
15	9999	138	126	115	104	99	92	86	98	97	97	97	14	98	98	98	94	76	37	99	99										
14	9999	135	122	112	104	94	84	83	98	96	82	59	26	54	36	97	97	97	92	62	99	99									
13	9999	140	117	101	90	83	74	79	98	97	97	97	103	96	96	97	96	75	99	99	99	99									
12	9999	138	119	69	69	65	67	79	92	97	96	96	123	109	98	93	95	96	96	90	54	99									
11	9999	95	95	110	96	94	95	95	92	75	95	92	75	99	99	99	99	99	99	99	99	99									
10	9999	154	123	100	111	97	91	94	94	81	93	93	93	93	94	88	67	33	99	99	99	99									
9	9999	146	124	111	103	103	95	90	93	93	93	93	93	93	79	83	58	99	99	99	99	99									
8	9999	140	120	107	100	98	93	88	92	91	92	92	93	86	83	99	99	99	99	99	99	99									
7	9999	148	129	118	112	107	101	97	95	90	88	92	90	91	91	92	91	90	83	63	99	99									
6	9999	147	132	118	111	105	99	94	92	87	91	91	89	87	91	91	91	91	90	85	78	56									
5	9999	142	138	123	112	102	95	93	90	84	90	92	86	90	91	90	89	90	89	85	59	99									
4	9999	142	131	127	113	103	94	89	87	81	90	90	84	90	89	89	90	87	63	99	99	99									
3	9999	111	128	104	105	112	107	95	89	86	79	90	90	90	90	84	75	67	84	84	89	86									
2	9999	100	102	91	90	92	84	72	69	80	80	89	86	65	99	99	99	99	99	99	99	99									
1	9999	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99	99									
0		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

(b) Water levels over C grid at storm landfall

Figure 9 (continued) Overbank flooding in Trinity Inlet

8. Reid, R.O. and Bodine, B.R., "Numerical Model for Storm Surges in Galveston Bay", Jnl. Waterways and Harbors Div., ASCE, Vol.94, 1968, p.33-57.


9. Sobeys, R.J., Adil, T.S. and Vidler, P.F., "User's Guide to ESTFLO/Version 2B-A Numerical Hydrodynamic Model of Unsteady Gradually Varied Flow in a One-Dimensional, Well-Mixed Estuarine System", Research Bulletin No. CS22, Department of Civil and Systems Engineering, James Cook University, February 1980.

10. Sobeys, R.J. and Harper, B.A., "Tropical Cyclone Surge Penetration Across the Great Barrier Reef", Procs., Third Australian Conference on Coastal and Ocean Engineering, I.E. Aust., Melbourne 1977, p.58-63.

11. Sobeys, R.J., Harper, B.A. and Stark, K.P., "Numerical Simulation of Tropical Cyclone Storm Surge", Department of Civil and Systems Engineering, James Cook University, Research Bulletin No. CS14, May 1977.

12. Sobey, R.J., Mitchell, G.M. and Adil, T.S., "Trinity Inlet Storm Surge Study", Department of Civil and Systems Engineering, James Cook University, May 1979 (for Department of Housing and Construction, Melbourne), unpublished.
13. Sobey, R.J., Mills, A.B. and Young, I.R., "Mermaid Sound Extreme Water Level Study", Department of Civil and Systems Engineering, James Cook University, May 1979 (for Woodside Petroleum Development Pty. Ltd., Perth), unpublished.
14. Sobey, R.J., Stark, K.P. and Adil, T.S., "Weipa Peninsula Extreme Water Level Study", Department of Civil and Systems Engineering, James Cook University, August 1979 (for Comalco Ltd., Brisbane), unpublished.
15. U.S. Weather Bureau, "Interim Report - Meteorological Characteristics of the Probable Maximum Hurricane, Atlantic and Gulf Coasts of the United States", Report No.HUR.7-97, 1968.
16. Welander, P., "Numerical Prediction of Storm Surges", *Advances in Geophysics*, Vol. 8, 1964, p.315-379.
17. Wu, J., "Wind Stress and Surface Roughness at Air-Sea Interface", *Jnl. Geophysical Research*, Vol.74, 1969, p.444-455.


R.J. SOBEY

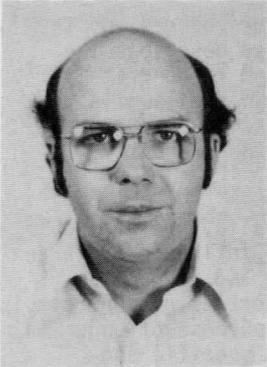

Rod Sobey completed an Honours Degree in Civil Engineering at the University of Queensland in 1965 and subsequently joined the Department of Harbours and Marine in Brisbane. He undertook graduate studies in Delft, The Netherlands in 1968/69 and Imperial College, London, U.K. in 1969/72, receiving his PhD from the University of London in 1973. He was awarded the 1973 Armstrong Medal and Prize by Imperial College for his PhD research.

From 1972 to 1974 he was a research engineer at the University of Karlsruhe, West Germany and since 1974 has been with the Department of Civil and Systems Engineering at James Cook University. His research interests include hurricane storm tides and wind waves, wave groups, estuaries and laboratory and numerical modelling. In 1980/81 he was a visiting scholar with the hydraulic and coastal engineering group at the University of California, Berkeley, U.S.A.


B.A. HARPER

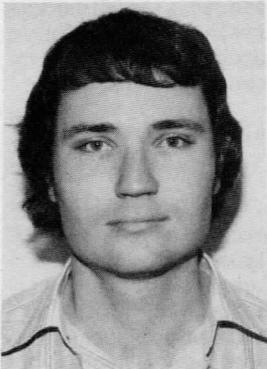

Bruce Harper completed an Honours Degree in Civil Engineering at James Cook University in 1975 and then remained at the Department of Civil and Systems Engineering for a further three years as Research Officer for the tropical cyclone storm surge simulation project. This was an extensive project calling for the simulation of a large number of design tropical cyclones along the length of the Queensland coast and formed the basis of his post-graduate research studies for a PhD.

At the conclusion of the SURGE project in mid-1978 he joined the Public Works Department of New South Wales Hydraulics Laboratory at Manly Vale in Sydney. Since that time he has been involved in the development of techniques for the investigation of nearshore effluent outfall systems along the NSW coastline, involving extensive monitoring of diffusion/dispersion processes in the nearshore area and the application of mathematical modelling. His interests in engineering software system design are being maintained at the Hydraulics Laboratory with regard to field data collection and to numerical simulation.

G.M. MITCHELL

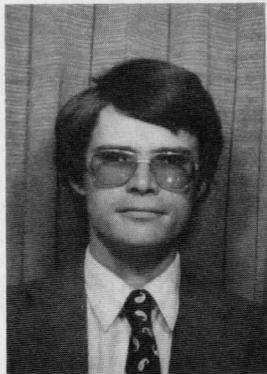

George Mitchell was born in England in 1952 and completed his schooling there in 1970, at Clifton College, Bristol. He obtained an Honours Degree in Civil Engineering in 1975 at the James Cook University. Remaining at James Cook he completed a Master of Engineering Science Degree (by research) in 1978. The research centred around the vortex shedding from slender rigid cylinders. Further work at James Cook involved the design and testing of an electrohydraulic computer controlled water wave generator.

In early 1979 he worked closely with Dr Sobey on the extension of SURGE to incorporate a moveable boundary capability, which deals with coastal flooding, and on the interfacing of SURGE with a one-dimensional estuarine model. During his last year at James Cook, Mr Mitchell was a tutor in the Civil and Systems Engineering Department.

In early 1980 he joined the Dynamics Department of Atkins Research and Development, part of the W.S. Atkins Group, based in Epsom, England. His work here has broadly covered wind engineering, hydro-dynamics and full-scale instrumentation of offshore structures.

CORRESPONDENCE ON THIS PAPER WILL BE ACCEPTED
FOR PUBLICATION UNTIL 31 AUGUST 1982